

Electrical Terminals

Vinyl Insulated Terminals

- Temperature range -40°C to 105°C (-40°F to 221°F)
- Flared rigid molded Polyvinyl Chloride Sleeve
- Funneled for easy wire entry
- UL listed


Nylon Insulated Terminals

- Flared, seamless brass sleeve for excellent electrical contact
- Temperature range -40°C to 105°C (-40°F to 221°F)
- Flared molded Nylon Sleeve
- UL listed

Heat Shrink Insulated Terminals

- Pre-insulated terminals and connectors protect against challenges of environment.
- Corrosion Resistance** -The adhesive lined heat shrink materials, when properly crimped and shrunk, provides a seal that is resistant to water, salt, steam and other related contaminants.
- Improved Mechanical Performance** - The heat shrink tubing adheres, when shrunk, to both the connector and wire insulation, providing improved pullout strength and strain relief.

Ring Terminals

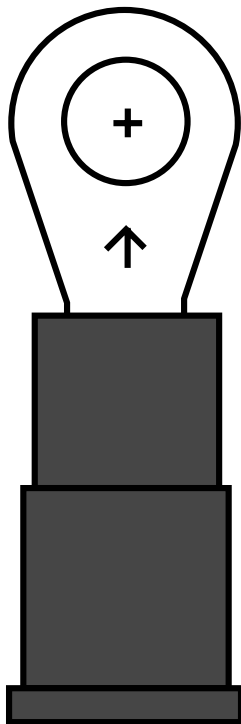

Wire GA.	Color	Stud Size	100 Pcs. Vinyl Insulated	100 Pcs. Nylon Insulated	50 Pcs. Heat Shrink Insulated
6	Blue	1/4"	14-42	14-42N	
6	Blue	3/8"		14-44N	
6	Blue	1/2"	14-46	14-46N	
8	Red	10		14-51N	
8	Red	1/4"	14-52	14-52N	
8	Red	5/16"		14-53N	
8	Red	3/8"		14-54N	
8	Red	1/2"	14-56	14-56N	
12-10	Yellow	6	14-13	14-13N	
12-10	Yellow	8	14-14	14-14N	14-14H
12-10	Yellow	10	14-19	14-19N	14-19H
12-10	Yellow	1/4"	14-15	14-15N	14-15H
12-10	Yellow	5/16"	14-16	14-16N	
12-10	Yellow	3/8"	14-17	14-17N	14-17H
12-10	Yellow	1/2"	14-18	14-18N	
16-14	Blue	4	14-21		
16-14	Blue	6	14-22	14-22N	14-22H
16-14	Blue	8	14-24	14-24N	14-24H
16-14	Blue	10	14-23	14-23N	14-23H
16-14	Blue	1/4"	14-25	14-25N	14-25H
16-14	Blue	5/16"	14-26	14-26N	14-26H
16-14	Blue	3/8"	14-27	14-27N	14-27H
22-18	Red	4	14-31		
22-18	Red	6	14-32	14-32N	14-32H
22-18	Red	8	14-34	14-34N	14-34H
22-18	Red	10	14-36	14-36N	14-36H
22-18	Red	1/4"	14-35	14-35N	
22-18	Red	5/16"	14-37	14-37N	
22-18	Red	3/8"	14-38	14-38N	